



### Special versions:

RT-A (dry installation)

RT-MS (multi-stage version)

### Accessories:

Extension pipe  
(VL max. = 500 mm)

On/Off switch on  
terminal box

Connecting cable completely  
wired with plug

Delivery rate up to 85 l/min  
Delivery head up to 10 m wc  
Immersion depth up to 500 mm  
Safe to run dry

For aggressive and neutral  
liquids


Made of PP and PVDF

Protection type IP55

For piping in the tank, the pump is  
also available without a pressure  
pipe.

### PERFORMANCE CHARTS

#### DELIVERY RATE

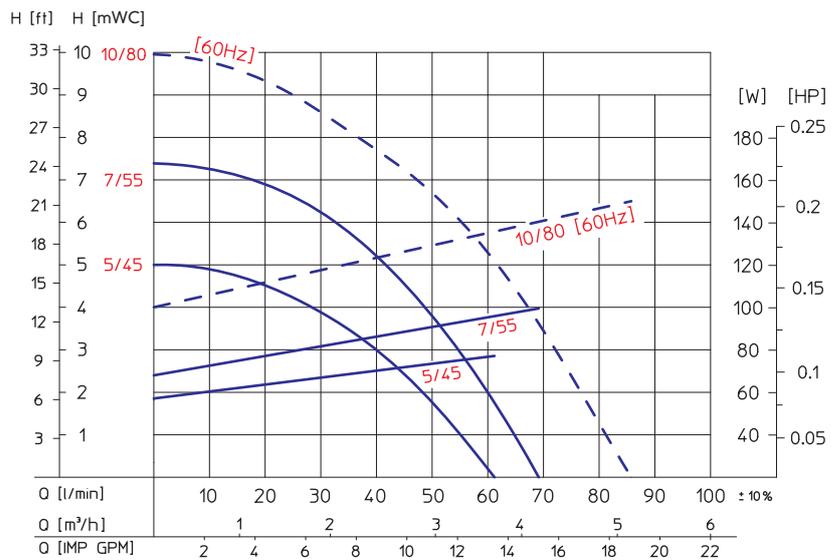

#### EFFICIENCY

